



Data Sheet


UTG4000A Series Waveform Generators




Main Features

- 80MHz/120MHz/160MHz/200MHz sine waveform output, 1 μ Hz full-band resolution
- 30MHz/40MHz/50MHz pulse waveform, adjustable rise/fall time
- 500MSa/s sampling rate, 16 bits vertical resolution
- Standard dual channels, supporting stand-alone or channel-coupling output mode
- 32Mpts arbitrary waveform depth, 7GB non-volatile arbitrary waveforms
- Versatile modulation options: AM, FM, PM, ASK, FSK, PSK, BPSK, QPSK, OSK, PWM, SUM, QAM
- Frequency cymometer range: 100mHz~800MHz
- 8 inch TFT LCD,WVGA (800×480)
- Standard Ports: USB Host, USB Device, LAN, 10MHz Input, 10MHz Output, Frequency Counter, FSK Trig, Modulation In

Panel Structure

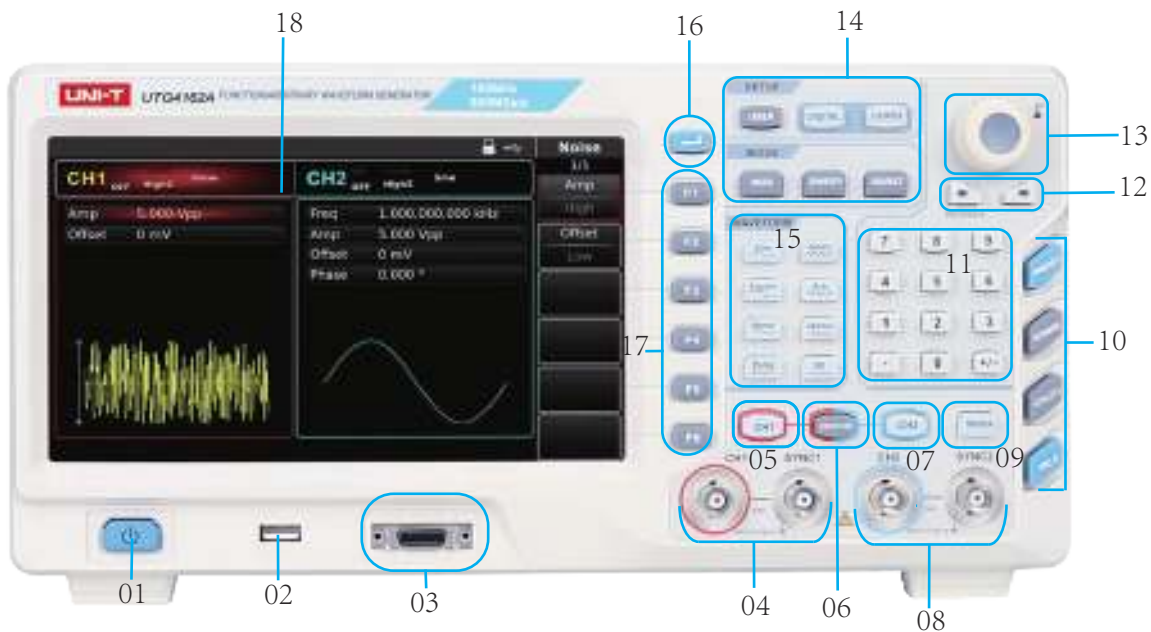


- (01) ON/OFF (02) USB interface (03) Protocol interface (04) CH1 output terminal/ sync output terminal (05) CH1 control terminal
 (06) Sync setting key (07) CH2 control terminal (08) CH2 output terminal/ sync output terminal (09) Manual trigger key
 (10) System function key (11) Numeric keyboard (12) Direction key (13) Multi-functional knob/key (14) Menu key
 (15) Quick selection of waveform type (16) Page Up/Down (17) Soft function key menu (18) Display screen

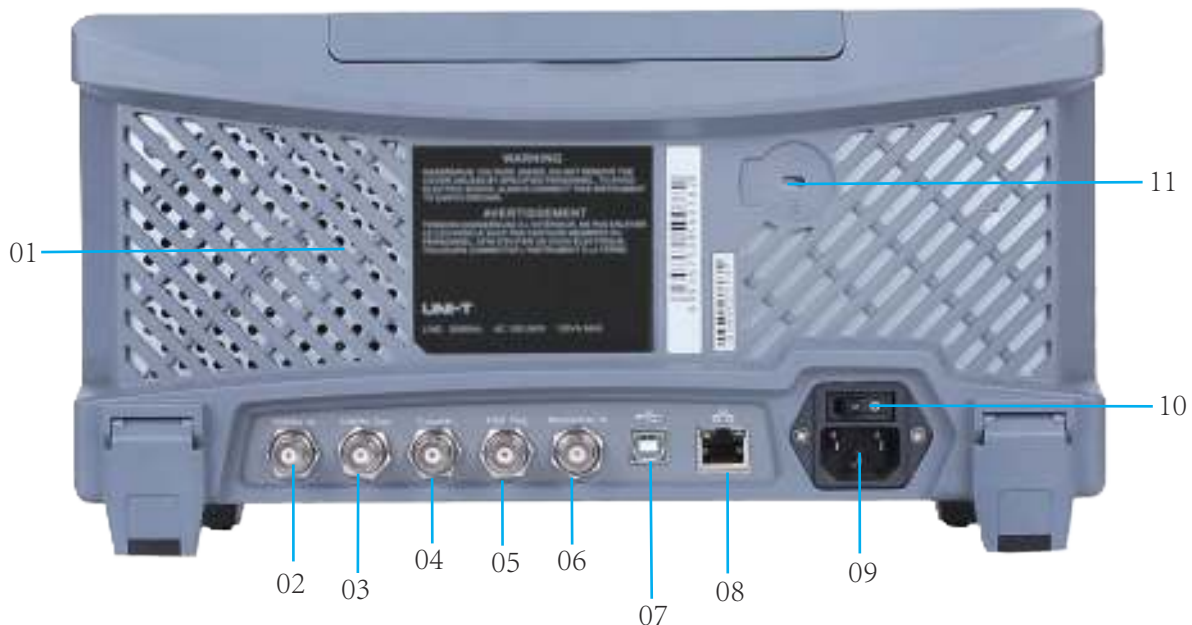

- (01) Heat emission hole (02) External 10MHz input terminal (03) Internal 10MHz output terminal (04) Frequency meter interface
 (05) External digital modulation interface (06) External analog modulation input terminal (07) USB Device (08) LAN port
 (09) AC power input terminal (10) Main power switch (11) Crate lock

Product Introduction


The UTG4000A Series waveform generators with multi-function design is ideal for various application scenarios. Featuring with the Function Generation, Arbitrary Waveform Generation, Pulse Generation, Harmonic Generation, Analog/Digital Modulation source, and cymometer, the UTG4000A series can handle a broad array of signal emulation applications from near DC up to 80MHz or even 160 MHz depending on model and function. The UTG4000A utilizes Direct Digital Synthesizer (DDS) technology delivers stable, precise, low distortion signals. The sleek, upright design features a high resolution 8 inch display screen, while the user-friendly interface design and panel layout improves efficiency.

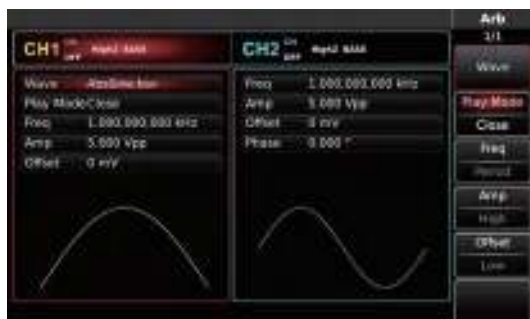

- Built-in arbitrary waveform available at any time



- Noise modes

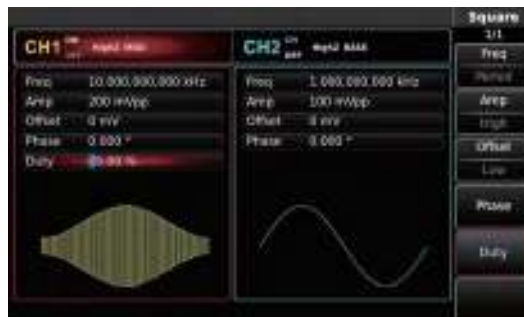

- Rich modulation functions



- Linear and logarithmic sweep waveform



- Customize harmonic generation function



- Special digital interface (optional)

Technical Specification

Key Specifications	UTG4082A	UTG4122A	UTG4162A	UTG4202A
Max. frequency	80MHz	120MHz	160MHz	200MHz
Channels	2			
Sampling rate	500MSa/s			
Waveforms	Sine, square, ramp, harmonic, pulse, noise, DC voltage, arbitrary			
Working modes	Continuous, modulation, sweep, burst			
Modulation types	AM, FM, PM, ASK, FSK, PSK, BPSK, QPSK, OOK, PWM, SUM, OAM			
Frequency Characteristics				
Sine	1 μ Hz~80MHz	1 μ Hz~120MHz	1 μ Hz~160MHz	1 μ Hz~200MHz
Square/Pulse	1 μ Hz~30MHz	1 μ Hz~40MHz	1 μ Hz~50MHz	1 μ Hz~60MHz
Ramp	1 μ Hz~2MHz	1 μ Hz~3MHz	1 μ Hz~4MHz	1 μ Hz~5MHz
Harmonic	1 μ Hz~40MHz	1 μ Hz~60MHz	1 μ Hz~80MHz	1 μ Hz~100MHz
Noise(-3dB)	80MHz	120MHz	160MHz	200MHz
Resolution	1 μ Hz			
Arbitrary Waveform				
Frequency range	1 μ Hz~20MHz	1 μ Hz~30MHz	1 μ Hz~40MHz	1 μ Hz~50MHz
Memory depth	8pts~32Mpts	8pts~32Mpts	8pts~32Mpts	8pts~32Mpts
Vertical resolution	16bits			
Minrise/fall time(typical) (Vpp)	<7ns	<5ns	<5ns	<5ns
Power	100V~240V AC, 50Hz/60Hz			
Display	8 inch TFT LCD, WVGA(800 x 480)			
Product net weight	3.5kg			
Product size (W×H×D)	336mm x 184mm x 108mm			
Standard quantity per carton	1pc			
Standard carton size	405mm x 225mm x 265mm			
Standard carton gross weight	4.8kg			

Ordering Information	
UTG4000A Series	UTG4162A: 160MHz, 500MSa/s, 32Mpts, 2-Channel
	UTG4122A: 120MHz, 500MSa/s, 32Mpts, 2-Channel
	UTG4082A: 80MHz, 500MSa/s, 32Mpts, 2-Channel
	UTG4202A: 200MHz, 500MSa/s, 32Mpts, 2-Channel
Standard Accessories	Power cord conforming to the standard of the destination country
	UT-D14: USB interface cable
	BNC cables(1M), 1 pair
Optional Accessories	UT-U02: digital cable



*The UTG4000A series have been certified by CE, UKCA, cTUVus

Warranty

Three-years warranty, excluding probes and accessories.

To protect your investment, please purchase from UNI-T official authorized global distributors.

Contact UNI-T

UNI-T group maintains a wide products category includes Digital Test & Measurement instruments, Field Testing Meter, Infrared thermal imaging products. As early as 2008, we continue to introduce self-developed Digital Test and Measurement instruments to the market and have made remarkable achievements. At present, we have formed a variety of product lines of Oscilloscope, AWG, Spectrum Analyzer, Bench Multi-meter, Power Supply, DC Load, Power Meter, LCR Meter, Micro Ohm Meter and Data logger.

